



**JACK**

China No.1

Shanghai stock  
listed

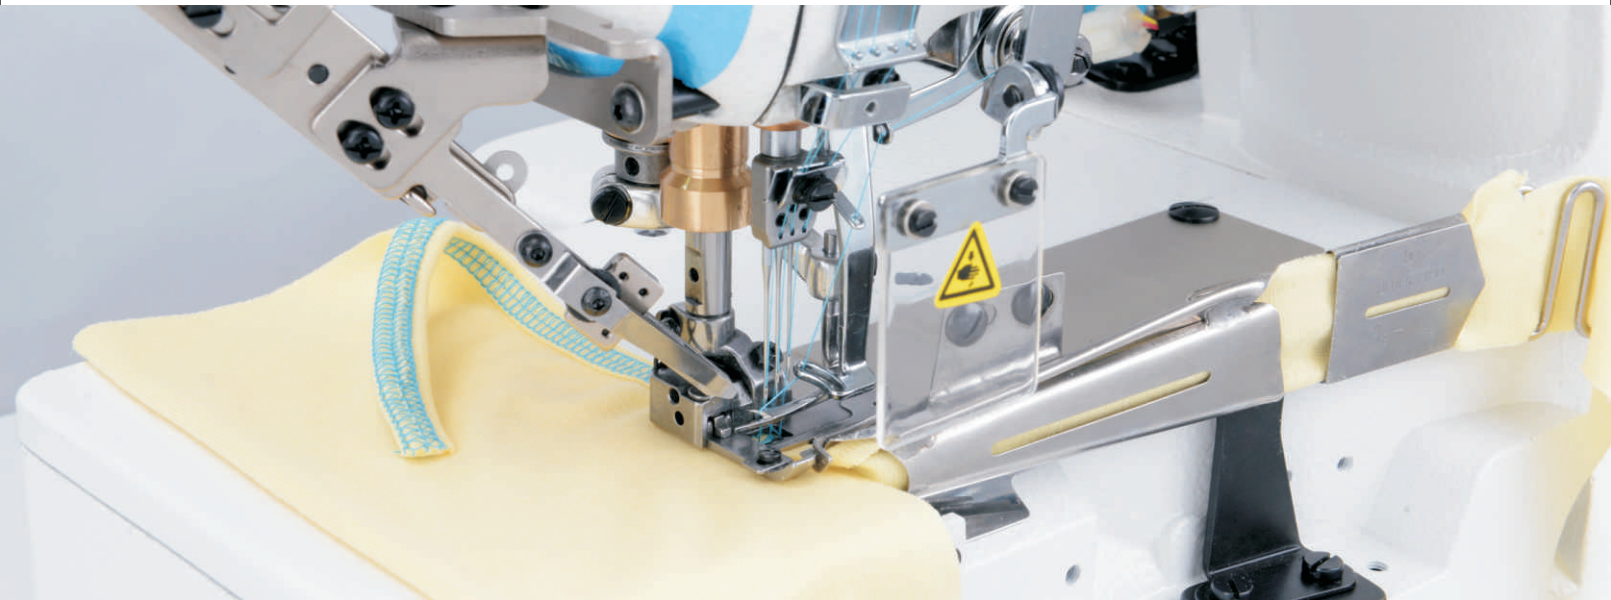


## High speed computerized flat-bed interlock

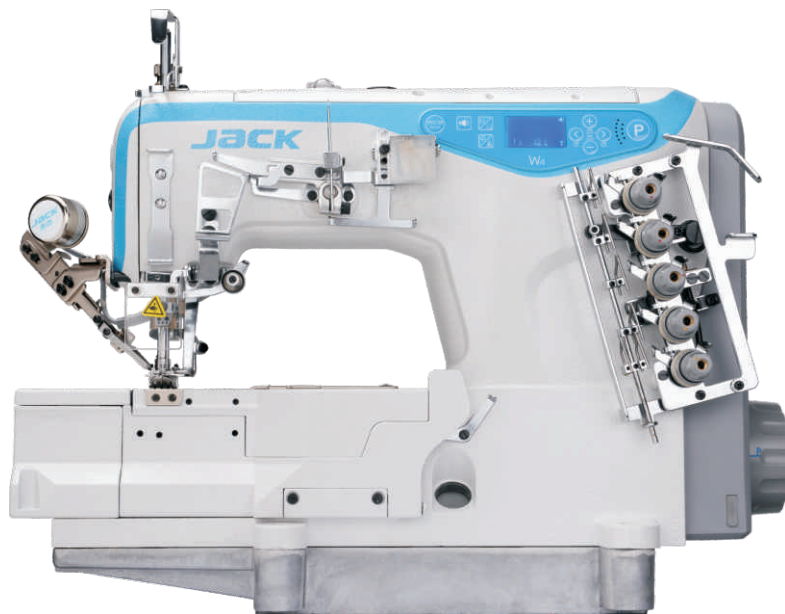

W4

# W4

High Speed Computerized Flat-bed Interlock Machine  
Full-automatic; Multifunctional; Stable

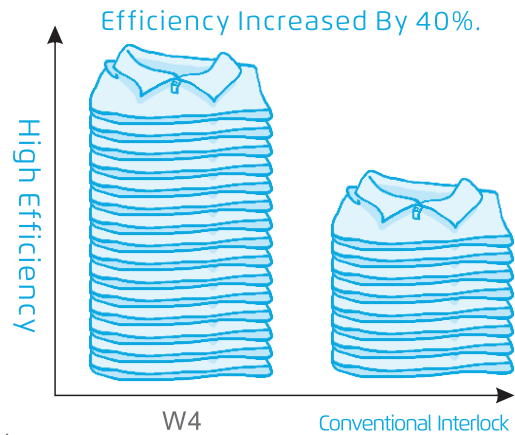

## 1 Automatic thread trimmer, Enhance operation efficiency

The upper and lower thread trimmer, service life of the Scissors is longer, with less trouble and high efficiency , 100% trimming precisely



## 2 For light and heavy fabric , beautiful stitch

Enlarge the sewing range , suitable for various fabrics ,smooth sewing without arch




## 3 Voice guide , easy to learn and easy to use

Each Button has Voice Reminder, Each Operation has Scientific Voice Guide .The simple fault can be solved by voice navigation function




## 4 One machine has multi-functions, fast switching

Only adding additional accessories, One machine is capable for Plain seam, Tape binding, Cover seam sewing and Bottom hemming , suitable for various process Sewing

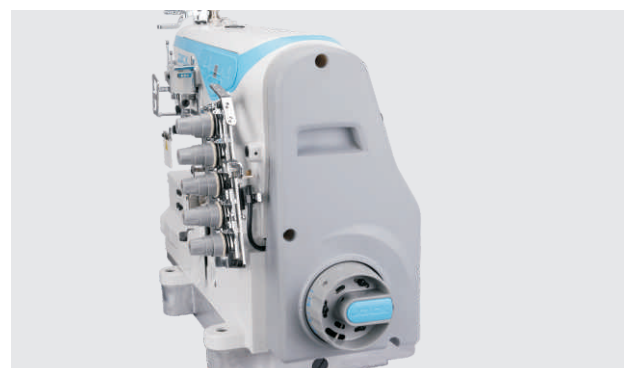


## 5 Integrated design, plug and operate right way

Mechanical and electrical integration, using only with one plug in a controller

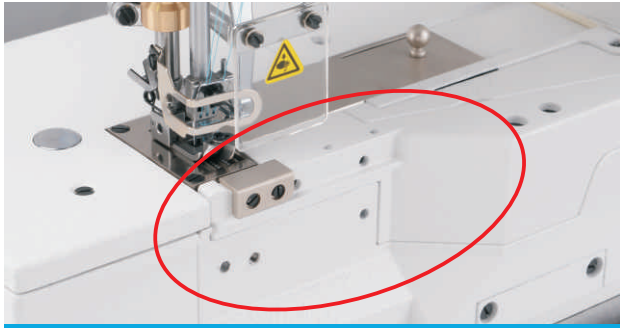


Short distance sewing bed

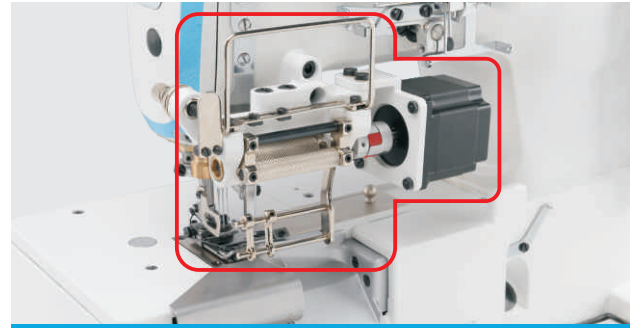

Elastic attach device



Out moved thread cam, fast positioning

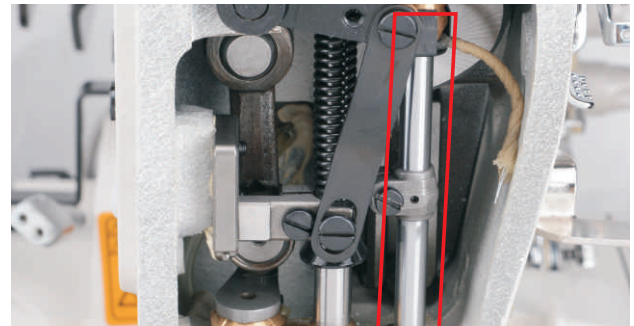

Control oil efficiently ,high good-product (yield ) rate

## Specification

Model	Functions	Needle	Needle No.	Thread No.	Stitch Length (mm)	Stitch Width (mm)	Differential Ratio	Presser Foot Lifting Height (mm)	Max. Speed (s.p.m)	Volume (mm)	Weight (kg)
W4-UT-01GB	Plain Seaming	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.65-1.3	7	5500	670×445×595	54/64
W4-UT-02BB	Tape Binding	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.65-1.3	7	5500	670×445×595	54/64
W4-UT-03DB	Covering Stitch	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.65-1.3	7	5500	670×445×595	54/64
W4-UT-08AC	Bottom Hemming	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.65-1.3	7	5500	670×445×595	54/64
W4-D-01GB	Plain Seaming	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.65-1.3	7	5500	670×445×595	48/58
W4-D-02BB	Tape Binding	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.65-1.3	7	5500	670×445×595	48/58
W4-D-03DB	Covering Stitch	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.65-1.3	7	5500	670×445×595	48/58
W4-D-05CB	Elastic Lace Attaching (Right-Side Cutter)	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.65-1.3	5	4000	670×445×595	48/58
W4-D-07CB	Elastic Lace Attaching	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.65-1.3	5	5500	670×445×595	48/58
W4-D-08AC	Bottom Hemming	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.65-1.3	7	5500	670×445×595	48/58
W4-D-23GB	Plain Seaming (Large Stitch Length)	UY128GAS 11-14#	3	5	6	5.6/6.4	1	7	4000	670×445×595	48/58
W4-D-23BB	Tape Binding (Large Stitch Length)	UY128GAS 11-14#	3	5	6	5.6/6.4	1	7	4000	670×445×595	48/58
W4-D-23GBL	Plain Seaming (Extra Large Stitch Length)	UY128GAS 11-14#	2	4	7-7.5	5.6/6.4	1	7	4000	670×445×595	48/58
W4-D-23BBL	Tape Binding (Extra Large Stitch Length)	UY128GAS 11-14#	2	4	7-7.5	5.6/6.4	1	7	4000	670×445×595	48/58

Note: UT: computerized, D: direct drive.